



The MTP8000Ex Series sets a new standard in TETRA ATEX radios. From their form to their function, these new radios have been carefully engineered to address workers' needs and offer the ultimate in safe, reliable and efficient communications in hazardous environments.

Meeting the latest ATEX and IECEx standards, this next generation of TETRA ATEX radios represents a significant step forward in improving worker safety, communications and efficiency.











Motorola has more than 20 years of experience in providing intrinsically safe two-way radios. Having shipped more than 100,000 TETRA ATEX radios, we are the leading supplier of TETRA radio communications solutions for use in hazardous environments.

We have used all of this knowledge and experience to develop the MTP8000Ex Series ATEX radios, giving workers the ability to work safer, work smarter and work anywhere with powerful audio, enhanced coverage, extended battery life, greater ruggedness, advanced ergonomics and increased usability.



MTP8000Ex Series

WORK SAFER WORK SMARTER WORK ANYWHERE

PROTECT YOUR WORKERS AND KEEP THEM SAFE IN THE MOST HAZARDOUS **ENVIRONMENTS**



ENHANCED COVERAGE

High receiver sensitivity and high transmit power gives the MTP8000Ex Series greater coverage and enhanced in-building performance.



Built to the latest ATEX and IECEx safety standards, the MTP8000Ex Series radios ensure that workers and firefighters can operate safely in the most hazardous environments.

BLUETOOTH AUDIO

A range of wireless accessories can be securely and reliably paired, from headsets and microphones for use in loud environments to large PTT buttons for use with protective clothing, reducing the risk of catching wires.

LOUD AND CLEAR AUDIO

The MTP8000Ex Series has loud and clear audio for use in noisy environments.

COVERAGE INDICATOR

For ultimate safety, the radio is fitted with an LED Coverage Indicator at the base of the antenna, clearly showing when coverage is poor.

LARGE EMERGENCY BUTTON

The MTP8000Ex Series includes an improved and larger emergency button, making it easier to use even with thick gloves.

INDUSTRIAL ACCESSORIES FOR THE MTP8000Ex



Communicate in the most demanding PetroChem and Industrial environments. Two PTTs (side and front), High/low volume control, emergency button, 1 programmable button. Supports Peltor helmet comms and 3.5mm discreet listening accessories.

For operations in very noisy environments. Provides the highest level of hearing protection with two layers of noise attenuation in each ear cup.

TWIN CUP HEADSETS*

TACTICAL HEADSETS*

For operations in noisy environments. Active noise cancellation protects hearing while maintaining peripheral listening and face-to-face conversations.

3.5MM ACOUSTIC TUBE

For in-ear audio, the 3.5mm listen only acoustic tube is secured to the Automatic Noise Cancelling RSM with push, twist and lock connection.



*Wired and wireless accessories available



MTP8000Ex **SERIES FEATURES**



LOUD AND CLEAR AUDIO

The MTP8000Ex Series is optimised for excellent audio performance in all types of noisy environments. Audio through both the speaker and accessories is clearer, even at full volume, and the user can be heard clearly against the loudest background noise.

Group Setup

ant Cal

Favorites

My Info

DM01



ENHANCED COVERAGE

High receiver sensitivity and high transmit power gives the MTP8000Ex Series greater coverage and enhanced inbuilding performance. For ultimate safety, the radio is fitted with an LED coverage indicator at the base of the antenna, alerting the user when coverage is poor.



RUGGED DESIGN

The MTP8000Ex Series radios are built to work in the toughest and most hazardous environments, in both the cold and wet or the dust and heat. with IP65, IP66 and IP67 ratings.





INTUITIVE USER INTERFACE

For simplicity, the interface makes use of icons and the menus can be configured to only show the options needed for particular groups of users.

TOP DISPLAY

The display panel on the top of the radio makes it easy to see emergency notifications, battery level, volume level and talkgroup when the radio is worn on the belt.

BLUETOOTH DATA

Smart Devices and tablet PCs can also be securely connected to the radios using Bluetooth for data collection or other applications, such as work scheduling.

ADVANCED ERGONOMICS

The T-bar grip makes the radio harder to drop and easier to hold, even for long periods. The exaggerated control knob to select volume and talkgroup, textured PTT button and tactile keypad make it MOTOR easier to use.

NAMEPLATE

The use of stick-on labels or external markers to identify the radio can compromise the ATEX certification. Now, the MTP8000Ex Series radios can be easily identified without causing any risk to user safety.

FIRE ACCESSORIES **FOR THE MTP8000Ex**



Communicate in the most demanding Fire Ground environments. Two PTTs (side and front), High/low volume control, emergency button, 1 programmable button. Supports Dräger and Savox helmet comms and 3.5mm discreet listening accessories



TEAM 3

SAVOX HC-1 Helmet communications with HC-1 bone conductive microphone and ear piece.

3.5MM ACOUSTIC TUBE For in-ear audio, the 3.5mm listen only acoustic tube is secured to the Automatic Noise Cancelling RSM with push, twist and lock

connection.



INTEGRATED BLUETOOTH

Secure Bluetooth Wireless technology is integrated in to the MTP8000Ex Series, ensuring that a range of wireless accessories and collaborative devices can be securely and reliably paired with the radios.



ADVANCED ERGONOMICS

The MTP8000Ex Series has been engineered to redefine usability, from the T-Bar profile to the exaggerated control knob, tactile keypad, enlarged emergency button and textured PTT button.



EXTENDED BATTERY LIFE

With an extended battery life in excess of 16 hours, workers can be confident that the MTP8000Ex Series radios will be ready for a longer shift in the event of emergencies or unplanned situations.



EASIER TO USE

With intuitive user interface, innovative nameplate, large main display and the secondary top display making it easier to see emergency notifications, talk group status or battery condition, the MTP8000Ex Series is designed to be easier to use.



ENHANCED COVERAGE

With high receiver sensitivity and high transmission power, urgent messages will be heard by the worker in locations where other radios would be out of coverage.



ADVANCED ERGONOMICS

The radios are designed with advanced ergonomics to be used easily by workers in protective clothing and heavy gloves.

LOUD AND CLEAR AUDIO

Automatic Gain Control allows workers to hear and be heard in any situation without the worry of loud background noise or interference.



RUGGED DESIGN

Built to the latest ATEX and IECEx safety standards for use in the toughest and most hazardous environments with IP65, IP66 and IP67 ratings.

EXTENDED BATTERY LIFE

With an extended battery life in excess of 16 hours, workers can be confident that their radios will be ready for a longer shift in the event of emergencies or unplanned situations.



BLUETOOTH SENSORS

Bluetooth can also be used to pair the radios with bio-monitors or gas sensors to automatically alert control and the workers to dangerous conditions.

STANDARD ACCESSORIES FOR THE MTP8000Ex



BELT CLIP Securely attaches the radio to a belt of up to 2.5 inches wide.

to maximise battery life performance.



VEHICLE CHARGER

Designed for permanent installation in a vehicle. Charges and optimises battery life performance on the go

CARRY CASES

Protects the radio from being knocked, dropped or mislaid. Can be worn on a belt or shoulder strap for extra convenience and safety.







WORK SMARTER WITH INTEGRATED BLUETOOTH

The MTP8000Ex Series radios have integrated Bluetooth wireless technology, providing a secure link to devices, which can be matched to the specific needs of the worker. These collaborative solutions combine devices and applications to improve the safety, effectiveness and efficiency of your workers.



WIRELESS ACCESSORIES

Fast wireless Push-To-Talk buttons can be used when protective clothing and gloves make it difficult to reach the radio. Wireless headsets and mics can be worn under protective clothing so workers can communicate clearly in hazardous environments.

DATA COLLABORATION

A mobile computing device or tablet PC can be connected to the radio and used to collect information, such as meter readings, sending the data back to control through the radio.

HEART RATE MONITOR

A heart rate monitor can be connected to the radio and used to detect if the worker or firefighter is at risk of heart problems or failure during strenuous activity or has collapsed in a hazardous environment.

GAS SENSORS

Body-worn gas sensors can be linked to the radio to automatically alert control and the worker to build-up of dangerous gases. If one sensor picks up a gas leak the other workers and control can be warned immediately.

LOCATION SENSORS

Bluetooth beacons across the facility or in high-value buildings can be used to detect the presence of the radio and track the location of a worker during a shift or a firefighter during an incident.

SERVICE FROM THE START **FOR TETRA TERMINALS**

ENSURING MAXIMUM PERFORMANCE TO MEET YOUR MISSION CRITICAL REQUIREMENTS

PROVEN PROTECTION

With our proven capability, you can be sure your equipment is expertly repaired and back in the hands of your users quickly. Using the latest tools and with strict adherence to Motorola engineering procedures, our expert technicians diagnose and repair units to original manufacturing specifications.

TECHNICAL EXPERTISE

Experienced technical support engineers work with you to diagnose and resolve hardware and software problems resulting in swift resolution of issues for your end users.

CUSTOMER SERVICE

A single source of support delivered through our state-of-the-art diagnostics equipment, repair tools, and an extensive inventory of replacement parts help us to provide expert repair on your TETRA terminals.

PEACE OF MIND

Our support programme protects your hardware investments from every angle, all designed to optimise device performance, minimise downtime and keep operations running smoothly and within budget.

 $^{\rm I}$ Performance may be degraded at extreme temperatures. ATEX/IECEx certification only valid when operated within -20 to +55°C

GENERAL

Duty cycle 5/5/90 > 16 hours Battery performance Duty cycle 5/35/60 > 12 hours > 1.2W

Loud and clear audio Integrated audio howling suppression

RF SPECIFICATIONS

Frequency bands 350-470 MHz. 800 MHz Transmitter RF Power class 31 & class 4 Receiver class A and B -116dBm (min); -118dBm (typical) Rx static sensitivity Rx dynamic sensitivity -107 dBm (min); -109 dBm (typical)

ENVIRONMENTAL SPECIFICATIONS

ATEX/IECEx certified: -20 to +55 Operating temperature °C1 Ordinary locations: Storage temperature °C -40 to +85 Humidity ETS 300-019-1-7 Class 7.3E, MIL STD 810 D, E, F, G IP64, IP65, IP66 & IP67 per Dust and water IEC-60079-0:2011 & IEC-60529 ingress protection Dust, water, rain, waterjet proof & submersible Shock, drop and vibration ETS 300-019 1-7 class 5M3; MIL-STD 810 D/E/F/G

MAIN VOICE SERVICES

Full duplex TMO private, PABX, PSTN, emergency Half duplex TMO private, group, emergency Half duplex DMO private, group, emergency Inter-MNI, gateway, repeater PTT double push

Adaptive audio contro

EMERGENCY CALL MANAGEMENT

Tactical emergency group call to ATTACHED talkgroup Non-tactical emergency group call to DEDICATED talkgroup Individual emergency call to PREDEFINED party (half/full duplex) HOT MIC emergency - hands free in moments that matter Emergency status message sent to dispatch console Smart TMO / DMO selection for emergency call set up - ensure call gets through

Preemptive priority calls

DMO REPEATER SERVICES

DMO repeater type 1A for efficient single channel operation DMO presence support for effective channel management voice, status & SDS repeated

BLUETOOTH AUDIO & DATA SERVICES

Bluetooth 2.1 +EDR, Bluetooth 4.0, Bluetooth Smart (BTLE) Bluetooth versions supported: Bluetooth 2.1 introduces mandatory encryption with secure simple pairing (SSP), easier pairing and preventing sniffing Bluetooth security Bluetooth 4.0 supports Security Manager (SM) services with AES encryption Bluetooth audio Headset profile Serial Port Profile, Dial Up Networking Profile, Discovery mode, Generic Access Profile, Object Push Profile, Generic Bluetooth data services Attributes Profile (GATT), Heart Rate Profile, Battery Service Profile, Devices Info Profile

Dust & Water Ingress Protection

Ambient Temperature Range

IECEX SPECIFICATIONS IEC 60079-0:2011

IEC60079-11:2011

Explosion-proof Operating Material Intrinsic Safety (Zone 1 & 2) Highest Gas Subgroup Temperature Class Suitable for Zone 1 & 2 Ambient Temperature Range **Dust & Water Ingress Protection**

G Ex ib IIC **T4** Gb IP65/66/67 2



ATEX SPECIFICATIONS EN60079-0:2012 EN60079-11:2012

Suitable for Zone 1 & 2 Temperature Class Highest Gas Subgroup Intrinsic Safety (Zone 1 & 2) **Explosion-proof Operating Material**

Gas (Environment)

2 (Equipment Category)

Surface Industries (Equipment Group)

 GAS

LOCATION SERVICES GPS, Beidou, Glonass Constellations supported Simultaneous satellites integrated external antenna -163 dRm Tracking sensitivity < 5 metre (50% probable) @ -130 dBm Accuracy ETSI LIP & Motorola LRRP Protocols

USABILITY

Language and keypad options Full and Simplified Keypad, Multiple keypad languages supported Enhanced T-bar grip for confident handling

Unique nameplate for simple identification of radio

Large 360° signal / status indicator for high visibility

USER CONTROLS

Large multi-function knob for volume and talkgroup control

User configurable one touch buttons and keys, extensive list of functions

CUSTOMISABLE, USER FRIENDLY MENUS

Menu shortcuts - user customisable

Menu editor, simplify and tailor to user needs

DISPLAY

Dual displays: large front mounted display with scalable fonts for readability, top mounted display for easy interaction when worn on belt

Colour Transflective Front Display, 240x320 pixel screen with 262,144 vivid colours viewable in bright sunlight

Colour Transflective Top Display, 200x112 pixel screen with 262,144 vivid colours viewable in bright sunlight

Flip screen, large/x-large text and icon options (front display only)

Screen Saver gif image and text (any user's selection)

Configurable smart backlight to optimise power use

Universal time display

Multiple display languages, user selectable

TALKGROUP & CALL MANAGEMENT - USER FRIENDLY, FLEXIBLE, EFFICIENT, FAST

Talkgroup capacity:

TMO Talkgroups up to 10,000

DMO Talkgroups up to 2,000

Folder capacity:

TMO Folders - up to 1,500, each capable of holding up to 2,048 TMO Talkgroups DMO Folders - up to 128, each capable of holding up to 1,024 DMO Talkgroups

Favourite folders - Up to 3

Country/network code list - up to 100 Scan lists: 40 lists of up to 20 groups

Dialling direct, scroll, speed, one touch button/key

AlphaNumeric search, call history redial

CONTACT MANAGEMENT - FAMILIAR CELLULAR STYLE INTERFACE FOR EASE OF USE

Up to 1000 contacts with 6 numbers per contact (max 2000 unique numbers

Multiple dialling methods to support multiple use cases

Fast/flexible call set up/answer

Set up a private call response to a group call via one touch button

TEXT & STATUS MESSAGING - FAMILIAR CELLULAR STYLE INTERFACE FOR EASE OF USE

Text message list: 20 message In/Out box

Intelligent keypad text input (model specific)

Status list: up to 400 pre-defined messages

USER SAFETY & WORKGROUP MANAGEMENT

RUA/RUI - Log on / ID management

SAFETY Man down sensor

SECURITY OPTIONS

Enhanced security - OTAR/DMO SCK

Authentication (mutual)

Air interface encryption (ETSI / SFPG TEA algorithms)

Security class 1, 2, 3 and 3G support

End to end encryption: Motorola CRYPTR micro hardware module

BOS smart card support

Permanent disable (ETSI, V2-customer restore)

Temporary disable (stun)

DATA & MESSAGING SERVICES

Single and multi slot packet data service

Secondary control channel

Radio messaging system (RMS)

WAP browser / WAP push

SDS messaging in TMO and DMO, incl concatenated messaging

ETSI and enhanced AT commands (including voice control)

Short data applications

TNP1 - Support simultaneous packet data and short data services over PEI

iTM fleet management (remote programming)

ACCESSORIES

and belt worn radio

Specialty and Third party

Robust side connector with high-performance matching accessories

Team ID antenna rings: efficient operations Whip 120mm (350-470MHz)

Antenna Stubby 80mm (806-870MHz) Stubby 80mm (380-430MHz) Active Remote Speaker Microphone (RSM) with volume control and emergency button Active Noise Cancelling RSM with Large Push-To-Talk with Audio - Wired Nexus jack. Compatible with Savox HC1 headset RMN5123A. Peltor headsets distributed by Motorola and Motorola 3.5mm Receive only voice tube PMLN7188A. Dräger smoke mask. Any 3rd party ATEX Bluetooth wireless technology headset Audio - Wireless supporting Fast PTT and Headset Profile

ATEX Belt clip 2.5 inch Shoulder wearing device Carry Solutions - for shoulder

All compatible Peter Jones Klick Fast docks and belt loops 2.5" or 3" Swivel belt loop

Hard Leather Case with 2.5" or 3" Belt Loop for simple and full


keypad models ATEX Small PTT nexus Adapter with selection of Heavy Duty Headsets, Twin Cup Heavy Duty Headset and Tactical Heavy

Duty Headset.

Savox ATEX IECEx C-C440 Large PTT. For use with the


following Savox headsets: Savox HC1 Headset ATEX, Savox

HC2 dual headset ATEX

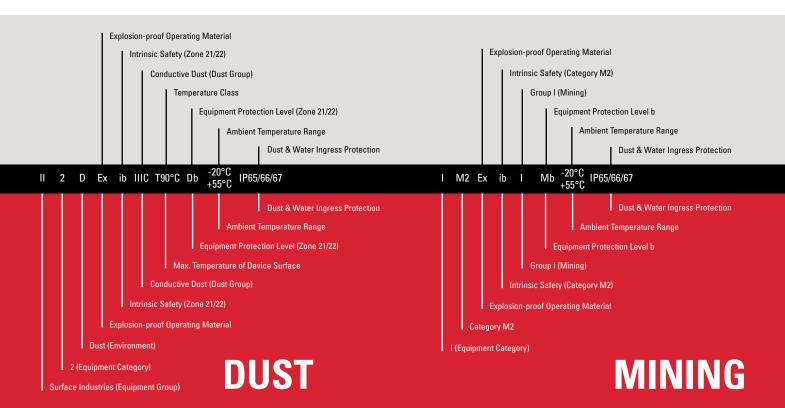

US MILITARY STANDARD MATRIX

APPLICABLE MIL-STD										
	MIL-STD 810C		MIL-STD 810D		MIL-STD 810E		MIL-STD810F		MIL-STD810G	
	METHOD	PROC/CAT	METHOD	PROC/CAT	METHOD	PROC/CAT	METHOD	PROC/CAT	METHOD	PROC/CAT
Low Pressure	500.1	1	500.2	II	500.3	11	500.4	II	500.6	II
High Temperature	501.1	I, II	501.2	I/A1, II/A1	501.3	I/A1, II/A1	501.4	I/Hot, II/Hot	501.6	I/A1, II/A1
Low Temperature	502.1	-	502.2	1, 11	502.3	1, 11	502.4	1, 11	502.6	1, 11
Temperature Shock	503.1	-	503.2	A1/C3	503.3	A1/C3	503.4	1	503.6	I-C
Solar Radiation	505.1	II	505.2	I/A1	505.3	I/A1	505.4	I/A1	505.6	I/A1
Rain	506.1	I, II	506.2	1, 11	506.3	1, 11	506.4	I, III	506.6	1, 111
Humidity	507.1	II	507.2	II	507.3	II	507.4	-	507.6	II/Aggravated
Salt Fog	509.1	1	509.2	I	509.3	I	509.4	-	509.6	-
Blowing Dust & Sand	510.1	1	510.2	1, 11	510.3	1, 11	510.4	1, 11	510.6	1, 11
Vibration	514.2	VIII/CatF, XI	514.3	I/Cat10, II/Cat3	514.4	I/Cat10, II/Cat3	514.5	I/Cat24, II/Cat5	514.7	I/Cat24, II/Cat5
Shock	516.2	I, II, V	516.3	I, IV, VI	516.4	I, IV, VI	516.5	I, IV, VI	516.7	I, IV, VI

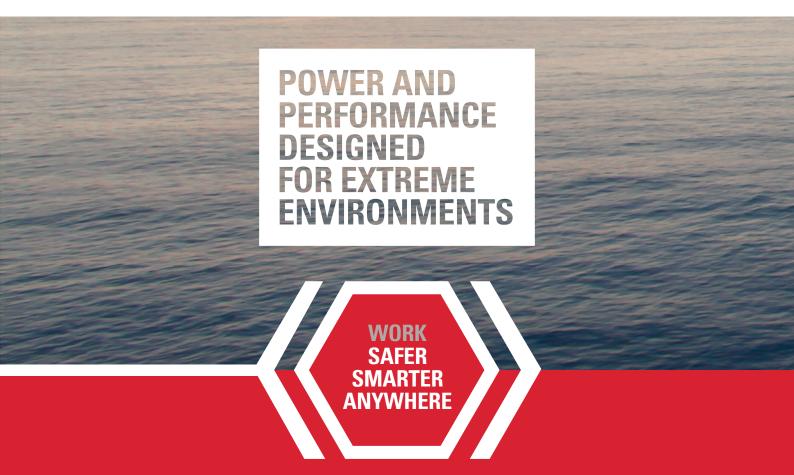

For more information on the MTP8000Ex Series TETRA ATEX radios, please visit **www.motorolasolutions.com/MTP8000Ex**

MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners.

Specifications are subject to change without notice. All specifications shown are typical.

© 2020 Motorola Solutions, Inc. All rights reserved.

MTP8000Ex Series DataSheet 11/20

